

Zero Clearance Gas Fireplace  
HBZDV4740

Direct Vent Gas Fireplace




*The ultimate in design, engineering & quality*

# Model HBZDV4740 Specifications

### Corner Framing Dimensions (inches)

	Louvered	Clean View Circulating Kit (CVCK)
	HBZDV47	HBZDV47
A	65 <sup>1</sup> / <sub>4</sub> "	70 <sup>3</sup> / <sub>16</sub> "
B	47 <sup>3</sup> / <sub>8</sub> "	48 <sup>3</sup> / <sub>8</sub> "
C	47 <sup>1</sup> / <sub>16</sub> "	48 <sup>1</sup> / <sub>16</sub> "
D	8 <sup>15</sup> / <sub>16</sub> "	10 <sup>7</sup> / <sub>8</sub> "
E	41 <sup>1</sup> / <sub>8</sub> "	44 <sup>11</sup> / <sub>16</sub> "
F	13 <sup>15</sup> / <sub>16</sub> "	13 <sup>15</sup> / <sub>16</sub> "
G	19 <sup>11</sup> / <sub>16</sub> "	19 <sup>11</sup> / <sub>16</sub> "
H	32 <sup>5</sup> / <sub>8</sub> "	35 <sup>1</sup> / <sub>16</sub> "

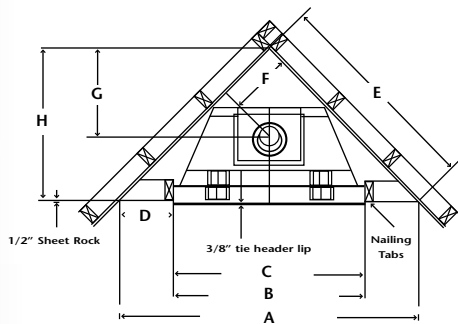

Top Flue Model	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
<b>Louvers</b>						
HBZDV47	43 <sup>1</sup> / <sub>16</sub> "	43 <sup>1</sup> / <sub>16</sub> "	47 <sup>1</sup> / <sub>16</sub> "	47 <sup>3</sup> / <sub>8</sub> "	19 <sup>7</sup> / <sub>16</sub> "	19 <sup>1</sup> / <sub>2</sub> "
<b>Clean View Circulating Kit (CVCK)</b>						
HBZDV47	49"	49"	48 <sup>1</sup> / <sub>16</sub> "	48 <sup>3</sup> / <sub>8</sub> "	21 <sup>15</sup> / <sub>16</sub> "	22"

Top Flue Model	Width	Height
<b>Viewing Area</b>		
HBZDV47	39 <sup>1</sup> / <sub>2</sub> "	26 <sup>3</sup> / <sub>8</sub> "



Model	HBZDV4740N	HBZDV4740LP
<b>Flue</b>	top	top
<b>Fuel</b>	natural	propane
<b>Input Max.</b>	40,000 BTU	36,000 BTU
<b>Input Min.</b>	27,000 BTU	30,000 BTU
<b>FE (P4.1-02)</b>	46.5%	42.5%

### Standard Features

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed

### Optional Features

**Designer Clean View Circulating Kit – (No Louvers Required), Optional Pull Screens**

**Decorative Black Panels or Grills – Grills available in Black or Classic Series Black with Polish Brass, Antique or Chrome Accents**

**Overlay Doors – Deluxe, Top Half, Double Arch and Double Door**

**Designer Doors – Arch or Straight Black Doors with Antique, Polished or Chrome Trims**

**Surrounds Wide (Louvered Units) - Polish Brass, Antique or Chrome Coverage – HBZDV4740 – 42<sup>3</sup>/<sub>8</sub>" h x 50<sup>1</sup>/<sub>8</sub>" w**

**Surrounds Slim Line (Louvered Units) - Polish Brass, Antique Brass, Chrome or Gun Metal Black, Coverage – HBZDV4740 – 42<sup>3</sup>/<sub>8</sub>" h x 48<sup>3</sup>/<sub>8</sub>" w**

**Fan Kit – Heat activated with variable speed control**

**Brick Refractory Liner – Traditional or Herringbone**

**Thermostat – Wall Mount Millivolt Thermostat or Programmable Thermostat**

**Remote Control – On/Off, Thermostat On/Off, Hi/Lo On/Off**

**Child Safety Screen**



Unit illustrated is a HBZDV4740N Zero Clearance Direct Vent Fireplace – Natural Gas, with LOGC60 Log Set, HB47GBL Grill Kit – Black, and Optional HB47RLT Traditional Refractory Liner.

Kingsman Industries maintains a program of continuous testing refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The model HBZDV4740 is certified to ANSI Z21.50a-2000/CSA 2.22a-2000, CGA 2.17-M91, CSA P.4.1-02 vented gas fireplace.



Unit illustrated is a HBZDV4740N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC60 Log Set, HB47CVCK Designer Clean View Circulating Kit, and Optional HB47RLH Refractory Liner – Herring Bone.

