

Zero Clearance Gas Fireplace
Model ZDV3318/3622



Direct Vent Gas Fireplace




The ultimate in design, engineering & quality.

This unit illustrated is a ZDV3622N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC50 Log Set - Seven Piece - Campfire, Z1GBL Grill Kit - Black.

The Ultimate in Zero Clearance Direct Vent Fireplaces for New Home Construction or Renovation

Your best choice for installation anywhere throughout your home.

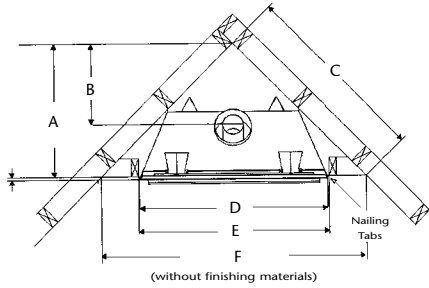

Corner Framing Dimensions (inches)

	ZDV3318	ZDV3622
A	21 ⁷ / ₈ "	25 ⁷ / ₁₆ "
B	11 ¹¹ / ₁₆ "	15 ¹ / ₄ "
C	31 ⁷ / ₁₆ "	36"
D	32 ¹ / ₂ "	36"
E	33 ³ / ₈ "	36 ³ / ₈ "
F	44 ³ / ₄ "	50 ¹⁵ / ₁₆ "

Unit and Framing Specifications (inches)

Top Flue Models	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
ZDV3318	30 ¹ / ₂ "	31"	32 ¹ / ₂ "	33 ¹ / ₈ "	15 ³ / ₄ "	15 ¹ / ₄ "
ZDV3622	33 ³ / ₄ "	34"	36"	36 ³ / ₈ "	15 ³ / ₄ "	15 ¹ / ₄ "

Choice of Log Sets

LOGC50 Log Set – Seven Piece Classic Oak shown on the front of brochure.




Unit illustrated is a ZDV3318N Zero Clearance Direct Vent Fireplace – Natural Gas, with LOGC50 Log Set, Z6GCR Grill Kit – Chrome.



Unit illustrated is a ZDV3622N Zero Clearance Direct Vent Fireplace – Natural Gas, with LOGC50 Log Set, Z36GBP Grill Kit – Classic Polish Brass, Z36ADTH Designer Arch Door Top Half.

Vertical flue option #1

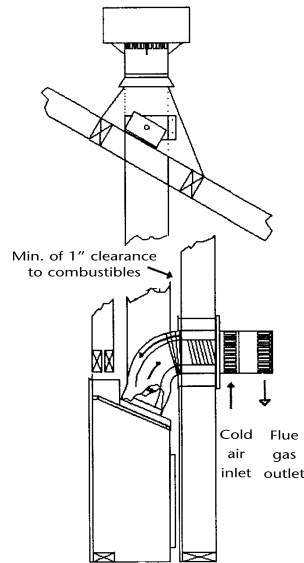

Horizontal flue option #2



Enjoy the elegance and warmth of glowing embers and dancing flames around our seven piece oak log set. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 25 years of experience.

Here is a fireplace that has fully sealed combustion chamber with no pollution spillage to depreciate the indoor air quality of your home.

Model	ZDV3318N	ZDV3318LP	ZDV3622N	ZDV3622LP
Fuel	natural	propane	natural	propane
Input Max.	19,000 BTU	18,000 BTU	21,000 BTU	21,000 BTU
Input Min.	12,100 BTU	11,900 BTU	14,200 BTU	16,200 BTU
EE (R4.1-02)	53.4%	51.4%	63.9%	60.2%

Features*

- Hi/low Millivolt valve system, will operate during power failures
- Pan burner, with realistic campfire burn
- Mobile Home, Bedroom and Bed Sitting Room approved

Optional Features

Fan Kit - Heat activated with variable speed control

Decorative Black Panels or Grills - Grills available in Black, Antique Brass Polish Brass, Chrome and Classic Series Black with Antique, Chrome, or Polish Brass accents

Arch Doors - Black, Antique, Polish Brass and Chrome

Designer Black Arch Door - Deluxe, Top Half, Double Arch and Double Door

Surrounds Wide - Polish Brass, Antique or Chrome

Coverage – ZDV3318 – 31³/₁₆" h x 36⁵/₈" w
ZDV3622 – 34¹/₄" h x 41¹/₈" w

Surrounds Slim Line - Gun Metal Black, Antique, Chrome, Polish Brass

Coverage – ZDV3318 – 30⁷/₈" h x 33⁷/₈" w
ZDV3622 – 34¹/₄" h x 37¹/₂" w

Wall Mount Thermostat – Standard on/off or Programmable 5 day (weekday) and 2 day (weekend)

Remote Control – On/Off or Thermostat or Hi/Lo On/Off

Child Safety Screen

Porcelain Reflective Liner

Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The models ZDV3318 and ZDV3622 are certified for USA/Canada. Certified to: ANSI Z21.88b-1999, CSA P.4.1-02, CSA 2.33b-M99 Vented Gas Fireplace Heaters and CGA 2.17-M91 Gas Fireplace Appliances for use at high altitudes.

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



Direct Vent Gas Fireplace



Kingsman Fireplaces
2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanind.com